


Dichtung TYTON, PN 5

5395

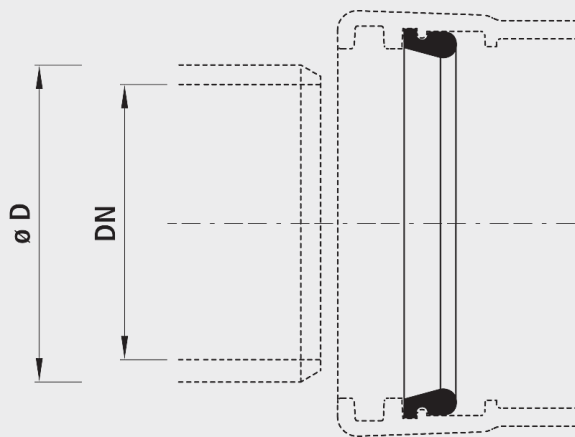

Anwendung

Werkstoff

- Die Tyton-Dichtung ist eine Steckmuffen-Dichtung für Gussrohre nach DIN 28603.
- NBR

	DN	ø D	PN (bar)	Gewicht (kg)
5395080000	80	98	5	0.100
5395100000	100	118	5	0.140
5395125000	125	144	5	0.150
5395150000	150	170	5	0.200
5395200000	200	222	5	0.310
5395250000	250	274	5	0.510
5395300000	300	326	5	0.800