


## Wall duct PE, with male thread, straight, PN 16

6850

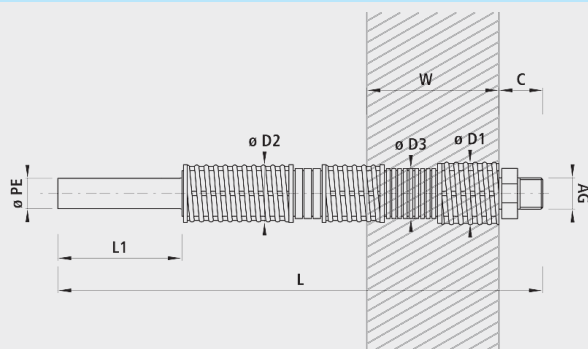

### Characteristics

- PE/brass connection with positive and force fitting into the wall protection pipe
- Compatible with multi-range inlets
- SVGW certified

### Material

- Weld-in end: PE 100, SDR 11
- Male thread: Brass
- Protective casing: PE with fixed-point fixation

### Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole

|            | ø PE | AG  | L (mm) | L1 (mm) | ø D1 (mm) | ø D2 (mm) | ø D3 | C cm | ø KB T (mm) | ø KB N (mm) | W T | W N (mm) | weight (kg) | NPK No. 411 | NPK No. 412 |
|------------|------|-----|--------|---------|-----------|-----------|------|------|-------------|-------------|-----|----------|-------------|-------------|-------------|
| 6850032070 | 32   | 1"  | 780    | 300     | 66        | 60        | 53   | 6-10 | 100         | 90          | 380 | 280      | 1.100       | 88415 2     | 71121 1     |
| 6850040070 | 40   | 1¼" | 780    | 300     | 66        | 60        | 53   | 6-10 | 100         | 90          | 380 | 280      | 1.300       | 88415 3     | 71122 2     |
| 6850051070 | 50   | 1¼" | 780    | 300     | 80        | 75        | 75   | 8-12 | 130         | 120         | 380 | 280      | 2.200       | 88415 4     | 71122 3     |
| 6850050070 | 50   | 1½" | 780    | 300     | 80        | 75        | 75   | 8-12 | 130         | 120         | 380 | 280      | 2.200       | 88415 4     | 71123 3     |
| 6850063070 | 63   | 2"  | 780    | 300     | 95        | 90        | 90   | 8-12 | 130         | 120         | 380 | 280      | 2.700       | 88415 5     | 71124 4     |
| 6850032110 | 32   | 1"  | 1100   | 300     | 66        | 60        | 53   | 6-10 | 100         | 90          | 680 | 580      | 1.500       |             |             |
| 6850040110 | 40   | 1¼" | 1100   | 300     | 66        | 60        | 53   | 6-10 | 100         | 90          | 680 | 580      | 1.700       |             |             |
| 6850050110 | 50   | 1½" | 1100   | 300     | 80        | 75        | 75   | 8-12 | 130         | 120         | 680 | 580      | 2.900       |             |             |
| 6850063110 | 63   | 2"  | 1100   | 300     | 95        | 90        | 90   | 8-12 | 130         | 120         | 680 | 580      | 3.700       |             |             |