


Wall duct Uni PE-AG, PN 16

6851

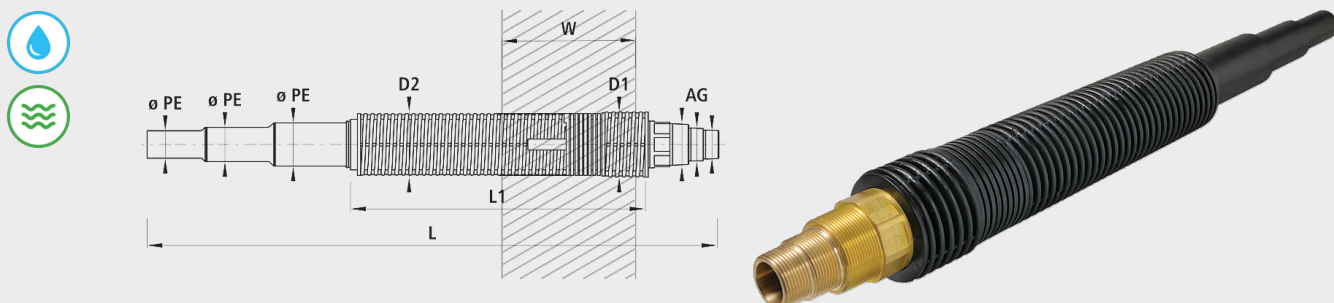

Characteristics

- PE/brass connection with positive and force fitting into the wall protection pipe
- Compatible with multi-range inlets

Material

- Weld-in end: PE 100, SDR 11
- Male thread: Brass
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- Diameters d 63, d 50 and d 40 suitable for welded socket (shortening at the marking)
- Suitable for Hawle-plug fittings

Caution

- Observe the installation instructions

	ø PE	AG	L (mm)	L1 (mm)	ø D1 (mm)	ø D2 (mm)	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6851000000	63-40	2"-1¼"	825	400	95	90	130	120	380	280	5.000