


Pull-over sleeve reduced, PN 100

6906

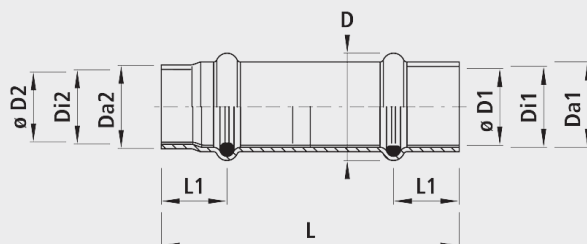

Characteristics

- Screw-less, self-sealing connection element for steel pipes
- The sealing chamber is designed so that it seals automatically, even with low internal pressures in the pipe system.
- To be pushed over on both sides for the same pipe connection dimensions
- Temperature range -10°C to +50°C

Installation and assembly

- Pushing over the steel pipes
- Weld both ends with a fillet weld
- Destroy O-rings using a welding torch to check the seal

Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.

	DN	PN (bar)	ø D1 (mm)	Di1	Da1	ø D2 (mm)	Di2	Da2	D (mm)	L (mm)	L1 (mm)	weight (kg)
6906088080	80	100	88.9	92.0	103	80	83.0	94	120	300	95	10.000
6906114108	100	100	114.3	117.0	128	108	111.0	124	145	300	95	12.000
6906168159	150	100	168.3	172.0	186	159	162.5	178	207	300	95	20.000
6906219211	200	100	219.1	222.5	241	211	214.5	243	258	400	95	32.000