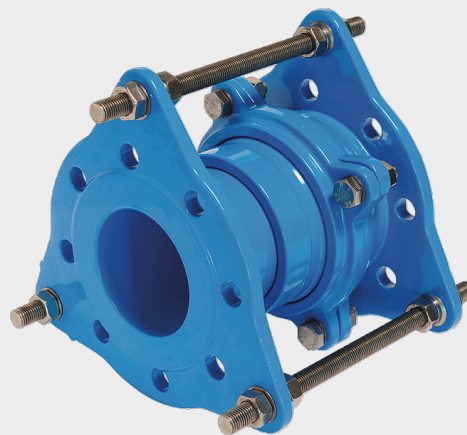
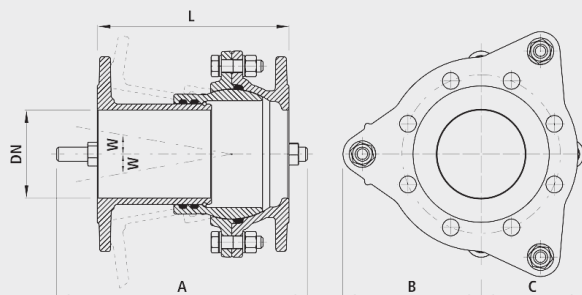


HAWLE-VARIO short, 0° till 10°, PN 16**8010****Application**

- To compensate for the differences in length, twisted or angled flanges up to 10°
- Can be used as a mounting and dismounting adapter
- Can be delivered in a shorter version of (No. 8010) or a longer version of (Nr. 8011)

Characteristics

- Can be delivered in a shorter version of (No. 8010) or a longer version of (Nr. 8011)

Material

- O-Ring seals: EPDM
- Housing
 - Spheroidal graphite cast iron EN-GJS-400 (GGG 40)
 - EWS coating according to GSK, RAL-GZ 662, coating thickness min. 250 µm

Thrust protection

- The HAWLE/VARIO can be secured in the installed position with a shearing protection set consisting of threaded rods (spherical washers, ball sockets and nuts made from INOX A2).

	DN	PN (bar)	L (mm)	A (mm)	B (mm)	C (mm)	weight (kg)
8010V00050	50	16	150-207	285	130	87	8.900
8010V00080	80	16	150-214	285	147	107	12.900
8010V00100	100	16	150-216	285	157	117	14.800
8010V00150	150	16	175-250	330	190	190	25.400
8010V00200	200	10	195-292	360	229	229	40.300
8010V00201	200	16	195-292	360	229	229	40.300