


Installation kit rigid, for sliders

9630

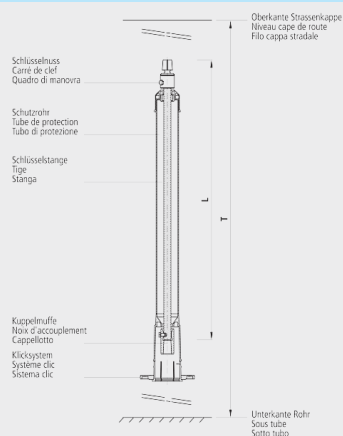

Application

- For sliders DN 50 up to DN 500

Characteristics

- Special lengths on request
- Schlüsselnuss DN 50 300 N (Nr. 9030020002)
- Schlüsselnuss DN 65 bis DN 200 500 N (Nr. 9030020003)
- Schlüsselnuss Klappen 120 N (Nr. 9030020004)

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

	DN	L (mm)	D (mm)	weight (kg)	NPK No. 411	NPK No. 412
9630050001	50	1090	1600	4.800	871136	871118
9630080001	65/80	1090	1670	4.700	871138	871121
9630100001	100	1087	1730	4.700	871139	871122
9630125151	125/150	1087	1820	4.700	87114*	87112
9630200001	200	977	1850	4.500	871143	871125
9630250000	250	927	1850	6.400	871144	871126
9630300000	300	870	1900	6.500	871145	871127
9630350000	350	690	2000	10.000	871146	
9630400000	400	640	2050	10.000	871147	871128