


Flushing fitting

9820

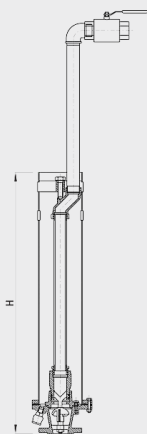

Design

- In lengths that correspond with the constructional lengths of the aeration and ventilation fittings. The length of the aeration and ventilation fitting used must be specified in the order. The flushing fitting can be reduced by 10 cm respectively.

Application

- The flushing and water-intake fittings can be inserted in the operating pipe instead of the aeration and ventilation valve. It is used for the flushing and aeration during the initial commissioning phases, controlled water intake and water sampling, etc.. It is possible to install and dismantle when under pressure.

Material

- Pipe, angle and screwed connection: Galvanized steel
- Fitting: EN GJL 250
- Valve connection: POM, NBR
- Ball valve: Nickel-plated brass 1 1/2"

	H (mm)	weight (kg)
9820000000	755-1305	7.400
9820000001	655-1305	7.400
9820075500	755	4.700
9820105500	1055	5.800
9820130500	1305	6.750
9820155500	1555	7.600