


Croce con flange, PN 16

8520

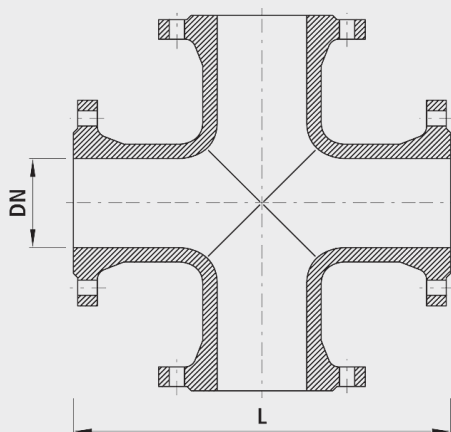

Materiale

- Corpo
 - Ghisa sferoidale EN-GJS-400 (GGG 40),
 - Rivestimento EWS secondo GSK, RAL-GZ 662, spessore dello strato min. 250 µm

Attenzione

- Lunghezze speciali fino a 2000 mm e le forme speciali secondo lo schizzo in St 37, con rivestimento in EWS, forme speciali

	DN	PN (bar)	L (mm)	Peso (kg)	N° CPN 411	N° CPN 412	BIM / CAD
8520080000	80	16	330	19.800	247418	244111	
8520100000	100	16	360	25.800	247419	244112	
8520125000	125	16	400	33.200	247421	244113	
8520150000	150	16	440	44.000	247422	244114	
8520200000	200	10	520	63.000	243423	244315	
8520201000	200	16	520	63.000	247423	244615	
8520250000	250	10	700	115.000	243424	244316	
8520251000	250	16	700	115.000	247424	244616	
8520300000	300	10	800	155.000	243424	244317	
8520301000	300	16	800	155.000	247424	244617	