


Handrad

7800

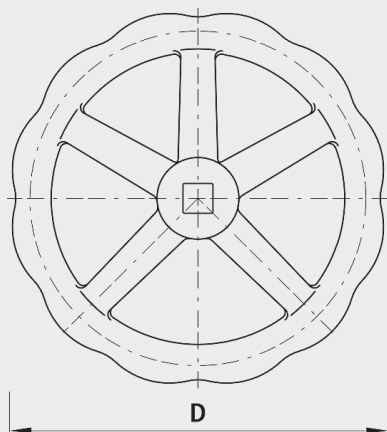

Anwendung

- Für alle Absperrarmaturen, Hausanschluss 3/4" bis 2", DN 20 bis DN 40, Hauptschieber DN 50 bis DN 600

Werkstoff

- Stahl oder Guss mit EWS-Beschichtung
- Ab DN 250: Blech
- Handrad
 - Guss (bis DN 200) oder Stahl (ab DN 250) mit EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

	DN	D (mm)	Gewicht (kg)	NPK-Nr. 411	NPK-Nr. 412	BIM / CAD
7800040000	3/4"-2"	140	0.600	873114	871517	
7800050000	50	160	1.100	873116	817518	
7800080000	80-65	190	0.900	873118	871521	
7800100000	100	240	1.000	873119	871522	
7800125150	125-150	320	2.200	87312*	87152	
7800200000	200	360	3.200	873123	872525	
7800250350	250-350	485	4.500	87312*	87152	
7800400500	400	600	21.000	873127	871528	
7800500600	500-600	800	21.200			