


Wall duct flexible PE, ball valve, Firesafe handle, PN 5

6853

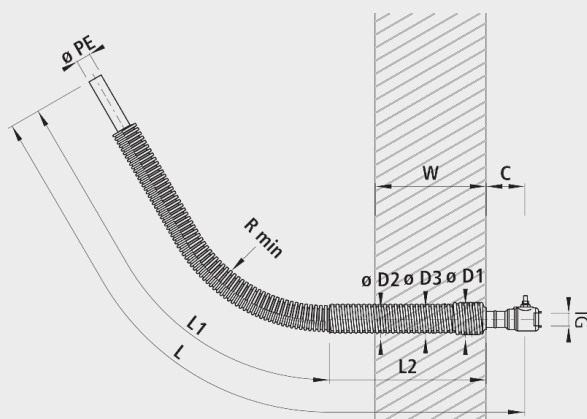

Characteristics

- Ball valve can be thermally loaded up to 650°C
- Is available with two-way ball valve or corner ball valve
- Firesafe handles fitted
- Connection with female thread
- Compatible with multi-range inlets
- SVGW certified

Material

- Fully encapsulated steel/PE connection
- Weld-in end: PE 100, SDR 11
- Pipe: PE, gas-carrying
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- The pull-out protection can be mounted directly.

Caution

- Observe the installation instructions
- Also available with other connection options (controller screw fitting, flange and backing flange)
- On request available without Firesafe handle (No. 68532)

	Corner- ball valve	ø PE	IG	L (mm)	L1 (mm)	L2 (mm)	R min.	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6853032299		32	1"	2710	2210	420	640	66	60	53	10-14	100	90	380	300	5.400
6853040299		40	1¼"	2750	2225	420	800	80	75	75	11-15	130	120	370	300	8.200
6853050299		50	1½"	2740	2225	420	1000	80	75	75	11-15	130	120	370	300	8.800
6853132299	x	32	1"	2710	2210	420	640	66	60	53	10-14	100	90	380	300	5.400
6853140299	x	40	1¼"	2750	2225	420	800	80	75	75	11-15	130	120	370	300	8.200
6853150299	x	50	1½"	2740	2225	420	1000	80	75	75	11-15	130	120	370	300	8.800

x = Corner ball valve