


## Compression sealing ring inside/outside for dry installation

6872

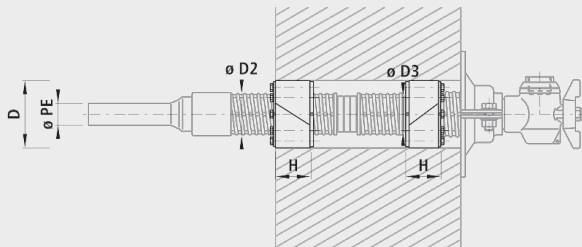

### Application

- Can be mounted directly in the drill hole or protection pipe

### Characteristics

- Two part sealing ring
- Pressure water tightness up to 1 bar

### Material

- INOX
- NBR-Rubber

### Installation and assembly

- Position the sealing ring on the wall entry and mount them together.
- Possible to use  $\varnothing$  8 mm copper wire for the earthing

### Anmerkung

- Scope of delivery: 2 sealing rings
- Sealing rings can be sold individually

|            | $\varnothing$ PE | D (mm) | $\varnothing$ D2 (mm) | $\varnothing$ D3 | H (mm) | $\varnothing$ KB T (mm) | weight (kg) | NPK No. 412 |
|------------|------------------|--------|-----------------------|------------------|--------|-------------------------|-------------|-------------|
| 6872V25032 | 32/40            | 100    | 60                    | 53               | 50/40  | 100                     | 1.500       | 714212      |
| 6872V40000 | 50               | 130    | 75                    | 75               | 50     | 130                     | 3.200       | 714213      |
| 6872V50010 | 63               | 130    | 90                    | 90               | 50     | 130                     | 2.500       | 714214      |