
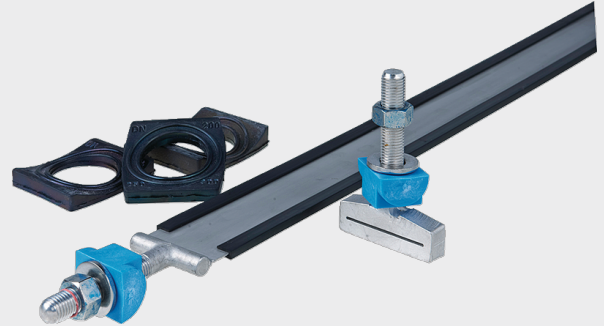


Universal strap stainless steel can be shortened without earthing

3115

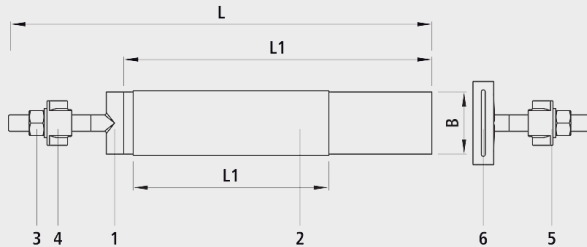

Application

- Suitable for all single and double brackets universal clamps DN 100 to DN 500
- If it is to be used in conjunction with the double bracket clamps, please quote the external diameter of the pipe.

Characteristics

- The saddle seals 3140 are included in the scope of delivery for the suitable areas.
- Tightening torque of the nuts max. 100 Nm

Material

- 1: Strap: INOX-steel V4A, DIN 1.457160 x 1,5 mm
- 2: Underlay: Rubber (No. 3119)
- 3: Nut M 16: V4A, Molybdenum coating
- 4: Articulation piece: Plastic (No. 3160)
- 5: Washer: Steel INOX V4A, DIN 1.4408
- 6: Construction-Tee

Installation and assembly

- The universal bracket can be adjusted to any external diameter in the stipulated range. To achieve this, a threaded T-piece is welded to one end of the bracket and an assembly T-piece is pushed over the end of plate on the opposite side. Cut the bracket plates to size and flange them step-by-step (please observe the enclosed assembly instructions).

	DN	DA min-max (mm)	B (mm)	L (mm)	L1 (mm)	L2 (mm)	weight (kg)
3115108260	100-200	108-260	60	810	700	600	1.350
3115260335	200-300	260-335	60	1040	930	830	1.600
3115335440	300-400	335-440	60	1360	1250	1150	1.900
3115440500	400-500	440-500	60	1540	1430	1330	2.050
3115500610	500	500-610	60	1890	1780	1680	2.400