
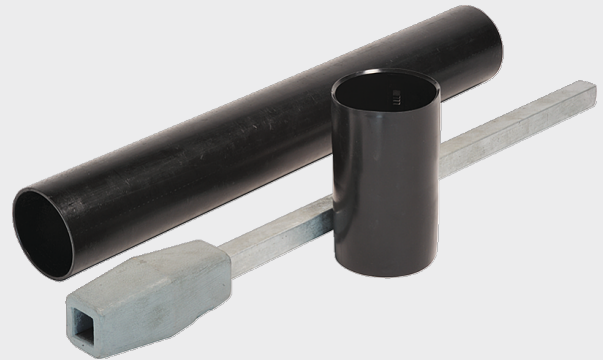


# Extension kit for installation kit rigid 9630

# 9631

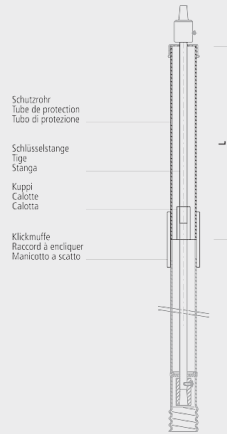

## Application

- For the extension of a rigid installation kit (EBG) that is already installed in a main slider range of DN 50 to DN 500

## Installation and assembly

- 1. Remove the key nut and sealing cap from the EBG to be extended.
- 2. Fit the click-on socket and coupling onto the EBG to be extended up to the stop.
- 3. Shorten the PE pipe and the square shaped steel to the required length and fit into the click-on socket or coupling up to the stop.
- 4. Remount the sealing cap and key nut on the extended EBG.

## Material

- Einbaugarnituren
  - Schutzrohr aus PE
  - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
  - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
  - Schlüsselstangen Stahl verzinkt

		DN	ø D	L (mm)	weight (kg)	NPK No. 412
9631000050		50 - 200	75	500	2.300	871821
9631000100		50 - 200	75	1000	3.800	
9631000150		50 - 200	75	1500	5.300	
9631100050		250 - 500	75	500	4.400	
9631100100		250 - 500	75	1000	7.200	
9631100150		250 - 500	75	1500	10.000	
9631000051	x	50-200	63	500	2.000	871821
9631000101	x	50-200	63	1000	3.500	871821
9631000151	x	50-200	63	1500	5.000	871821

x = Type 2016