


Extension kit for installation kit rigid 9100

9101

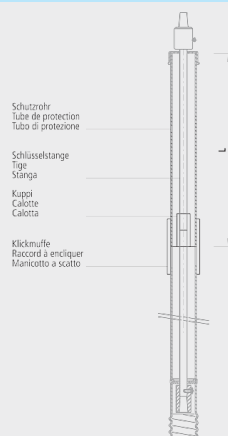

Application

- For the extension of a rigid installation kit (EBG) that is already installed in a house connection range of DN 20 to DN 40 and ¾" to 2"

Installation and assembly

1. Remove the key nut and sealing cap from the EBG to be extended.
2. Fit the click-on socket and coupling onto the EBG to be extended up to the stop.
3. Shorten the PE pipe and the square shaped steel to the required length and fit into the click-on socket or coupling up to the stop.
4. Remount the sealing cap and key nut on the extended EBG.

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

	ø D	L (mm)	weight (kg)	NPK No. 412
9101000050	48	500	1.200	871821
9101000100	48	1000	2.200	871821
9101000150	48	1500	3.200	871821