


Pull-over sleeve reduced, PN 40

6905

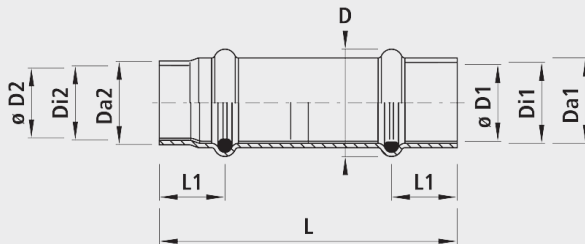

Characteristics

- Screw-less, self-sealing connection element for steel pipes
- The sealing chamber is designed so that it seals automatically, even with low internal pressures in the pipe system.
- To be pushed over on both sides for the same pipe connection dimensions
- Temperature range -10°C to +50°C

Installation and assembly

- Pushing over the steel pipes
- Weld both ends with a fillet weld
- Destroy O-rings using a welding torch to check the seal

Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.

	DN	PN (bar)	$\varnothing D1$ (mm)	Di1	Da1	$\varnothing D2$ (mm)	Di2	Da2	D (mm)	L (mm)	L1 (mm)	weight (kg)
6905088080	80	40	88.9	91.6	101.6	80	82.5	92.5	120	500	100	6.400
6905114108	100	40	114.3	117.0	127.0	108	111.0	121.0	145	500	100	8.000
6905168159	150	40	168.3	172.5	182.5	159	162.5	172.5	207	500	100	10.000
6905219209	200	40	219.1	222.5	233.5	209	212.5	223.5	258	500	100	16.000
6905219211	200	40	219.1	222.5	233.5	211	214.5	225.5	258	500	100	16.000
6905219216	200	40	219.1	222.5	233.5	216	219.5	230.5	258	500	100	16.000