
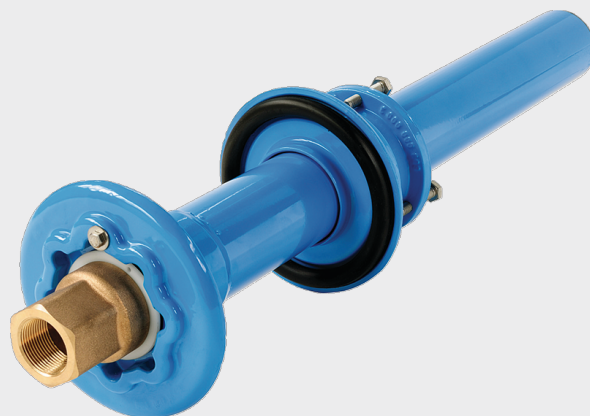


## PE-quick-fit wall duct straight, PN 16

6830

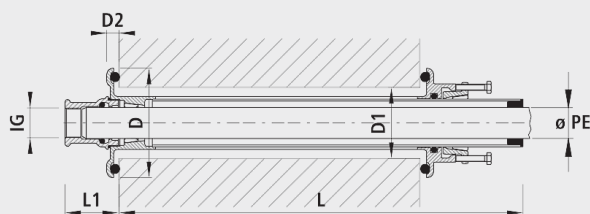

### Application

- Suitable for pipe-in-pipe installation
- For an efficient assembly in the core drill hole d 90 mm

### Characteristics

- Does not convey media
- PE pipe is screwed in on the cellar side

### Material

- Steel 37 and GGG 40, with EWS epoxy coating
- Fitting: Red bronze

### Installation and assembly

- Dry installation
- Dichtflansch muss auf glatter, gratfreier Mauerfläche aufliegen
- Wall thickness up to 600 mm

	ø PE	IG	PN (bar)	D (mm)	D1 (mm)	D2 (mm)	ø KB N (mm)	L (mm)	L1 (mm)	weight (kg)	NPK No. 411	NPK No. 412
6830040000	40	1 1/4"	16	170	130	15	90	700	85	8.900	882273	711122
6830050000	50	1 1/2"	16	170	130	15	90	700	85	9.600	882274	711133