


Highly flexible wall duct, PE-AG, PN 16

6854

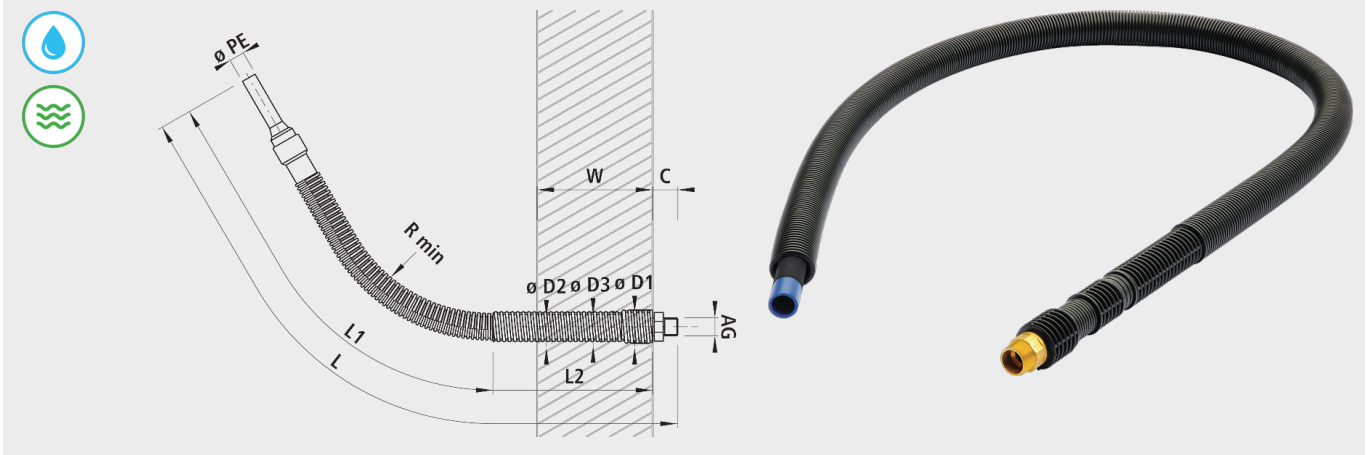

Characteristics

- PE/brass connection with positive and force fitting into the wall protection pipe
- The networked high pressure hose makes it possible to have a very small bending radius
- Compatible with multi-range inlets
- SGVW certified

Material

- Weld-in end: PE 100, SDR 11
- High pressure hose: grid
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- Other lengths on request

	$\varnothing PE$	AG	L (mm)	L1 (mm)	L2 (mm)	R min.	$\varnothing D1$ (mm)	$\varnothing D2$ (mm)	$\varnothing D3$	C cm	$\varnothing KB T$ (mm)	$\varnothing KB N$ (mm)	W T	W N (mm)	weig ht (kg)	NPK No. 411	NPK No. 412
6854032200	32	1"	3112	2670	400	350	66	60	53	6-10	100	90	400	300	4.800	8841 62	7131 11
6854040200	40	1¼"	3115	2670	400	350	66	60	53	6-10	100	90	400	300	8.000	8841 63	7131 22
6854050200	50	1½"	3127	2670	400	350	80	75	75	8-12	130	120	400	300	8.500	8841 64	7131 33
6854063200	63	2"	3127	2670	400	350	95	90	90	8-12	130	120	400	300	11.200	8841 65	7131 44