


Underfloor hydrant telescopic

N492

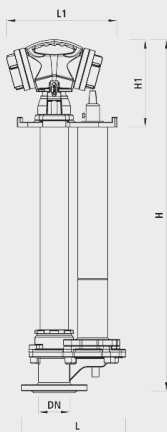

Design

- 2 storz couplings 75
- Key nut 20 mm
- integrated extendable upright pipe
- Permanently mounted flange seal

Characteristics

- Hydrant head extendable and rotatable through 360°
- 15 rotations open/close with fixed stops in the open/close position
- Automatic drainage, frost-resisting
- Flanged connection DN 80

Material

- Protection against corrosion through epoxy powder coating and use of stainless materials
- Seals: EPDM with DVGW W270 approval

	DN	H (cm)	Frost depth (cm)	Pull out (cm)	L1 (cm)	H1 (cm)	weight (kg)
N492000081	80	81	57	42.5	32	26	40.000
N492000106	80	106	97	67.5	32	26	47.000
N492000131	80	131	135	67.5	32	26	48.000