


# Slider actuation lock for all the EBG rigid/tele

# 7850

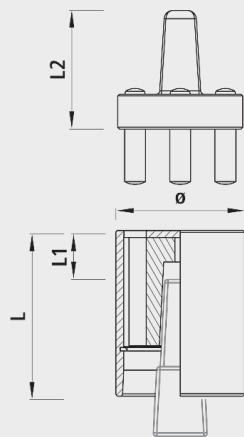

## Application

- Prevents the unauthorised actuation of the slider, suitable for all installation fittings from ¾" to 2" and DN 50 to 400 DN in the rigid and tele versions, z.B.: -Zone separation slider-Slider before the rinsing, draining or hydrant lines.

## Installation and assembly

- Carefully fit the slider actuation lock (1) onto the key nut of the installation kit.
- Adapter for actuation with slider key(2)

## Caution

- The slider can only be operated with the appropriate adapter.
- It is not possible to disassemble the slider actuation lock .
- Can only be assembled with the key nut No. 9028020001/No. 9028014001/No. 9030250001

	Type	ø (mm)	L (mm)	L1 (mm)	L2 (mm)	weight (kg)
7850000000	1	75	95	30		0.510
7850000001	2				60	0.700