


## Interchangeable slider incl. loose flanges, tension strength, PN 16

# 4019

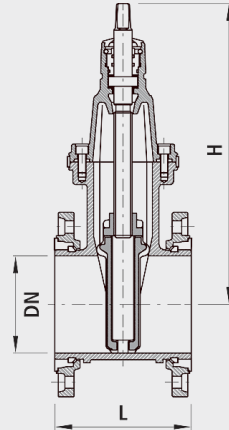

### Application

- Replacement of the flange sliders at zero potential

### Characteristics

- Gehäuse
  - nach DIN EN 1092-2
  - DN 25 bis DN 150: PN 16
  - DN 200 bis DN 600: PN 10 oder 16; bei Bestellung angeben
  - DN 65: 4-Loch-Flansch
- Short construction length "F4" according to DIN 558-1
- High tensile loose flanges incl. the seal
- Operating pressure max. 16 bar
- Operating temperature
  - max. 40 °C

### Material

- Housing
  - Spheroidal graphite cast iron EN-GJS-400 (GGG 40)
  - EWS coating according to GSK, RAL-GZ 662, coating thickness min. 250 µm

### Installation and assembly

- Note the screw lengths

### Caution

- Spezielles Oberteil mit beschichteter Spindel für Motorenantriebe im regelmässigen Gebrauch ab DN 150 erhältlich
- Reduce screw length to make it 5 mm shorter than a standard flange connection. Only use one washer per screw.

|            | DN  | PN (bar) | H (mm) | L (mm) | weight (kg) |
|------------|-----|----------|--------|--------|-------------|
| 4019080000 | 80  | 10/16    | 313    | 180    | 16.900      |
| 4019100000 | 100 | 10/16    | 343    | 190    | 22.000      |
| 4019125000 | 125 | 10/16    | 421    | 200    | 34.000      |
| 4019150000 | 150 | 10/16    | 433    | 210    | 39.000      |
| 4019200000 | 200 | 10       | 541    | 230    | 61.000      |
| 4019200016 | 200 | 16       | 541    | 230    | 61.000      |

