


## Universal tapping clamp with flange outlet and twin strap, PN 16

# 3511

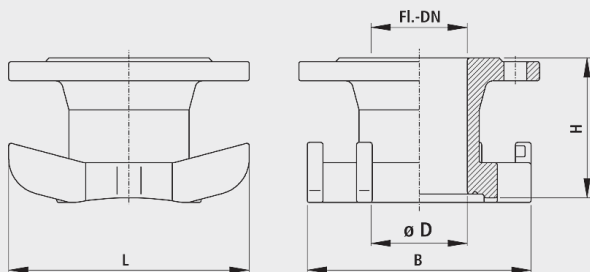

### Application

- For cast, FZM, steel and Eternit pipes, DN 150 – DN 500.

### Characteristics

- Operating temperature - max. 40 °C
- Pressure PN 16

### Material

- Gehäuse
  - Späroguss EN-GJS-400 (GGG 40)
  - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

### Caution

- Specify pipe NP with order.

|            |   | DN (mm) | Flange-DN (mm) | ø D | PN (bar) | L (mm) | B (mm) | H (mm) | Drill-ø max. (mm) | weight (kg) | NPK No. 412 |
|------------|---|---------|----------------|-----|----------|--------|--------|--------|-------------------|-------------|-------------|
| 3511080150 | 1 | 150-500 | 80             | 80  | 16       | 200    | 185    | 120    | 77                | 7.700       | 261113      |
| 3511100200 | 2 | 200-500 | 100            | 100 | 16       | 200    | 185    | 120    | 95                | 8.300       | 261114      |

1 = Dichtung 3170 verwenden

2 = Dichtung 3180 verwenden