


## Pillar with handwheel and position indicator HAWAK

7840

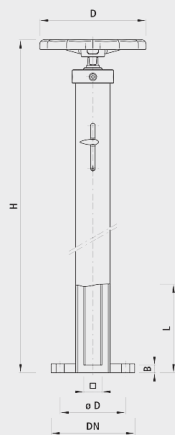

## Characteristics

- Auxiliary construction including optical position indicator to permit the manual opening or closing of fittings that are used in the system construction.
- Quick and easy assembly with INOX connection flange, DN 65, drilled acc. to EN 1092-1.
- Column stand housing: INOX (polished)
- Spindle: INOX
- Cover: EWS-coated steel
- Spindle slide bearings: POM
- Handwheel: EWS-coated cast
- For further technical information see Chapter i

	DN	H (mm)	D (mm)	B (mm)	ø D	Square (mm)	L (min.-max.)	Flange- connection	weight (kg)
7840050000	50	980	160	20	145	20	100-250	DN 65, PN16	13.000
7840065000	65	980	190	20	145	20	100-250	DN 65, PN16	13.000
7840080000	80	980	190	20	145	20	100-250	DN 65, PN16	13.000
7840100000	100	980	240	20	145	20	150-300	DN 65, PN16	13.000
7840125000	125	980	320	20	145	20	150-300	DN 65, PN16	15.000
7840150000	150	980	320	20	145	20	150-300	DN 65, PN16	15.000
7840200000	200	980	360	20	145	20	150-300	DN 65, PN16	16.000
7840250000	250	980	485	20	145	25	200-350	DN 65, PN16	21.000
7840300000	300	980	485	20	145	25	200-350	DN 65, PN16	21.000
7840350000	350	980	485	20	145	25	200-350	DN 65, PN16	21.000
7840400000	400	980	600	20	145	25	200-350	DN 65, PN16	30.000