


Installation kit tele, short, for sliders

9501

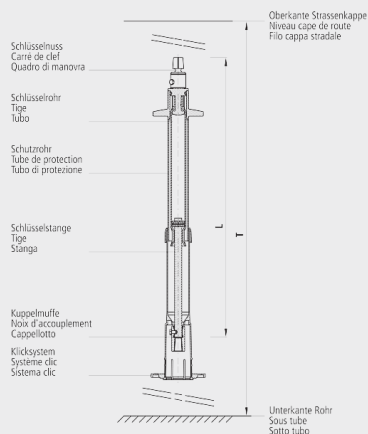

Application

- For sliders DN 50 to DN 300

Characteristics

- The telescope allows a continuous alignment to the final street height.
- Retrospective extension not possible
- Schlüsselnuss DN 50 300 N (n°. 9030020002)
- Schlüsselnuss DN 65 bis DN 200 500 N (Nr. 9030020003)
- Schlüsselnuss Klappen 120 N (Nr. 9030020004)

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

	DN	L (mm)	D (mm)	weight (kg)	NPK No. 411	NPK No. 412
9501050001	50	590-840	1090-1340	4.500	871176	871218
9501080001	65/80	590-840	1100-1350	4.500	871178	871221
9501100001	100	587-837	1225-1475	4.500	871179	871222
9501125151	125/150	587-837	1330-1580	4.400	87118*	87122
9501200001	200	527-707	1400-1580	4.200	871183	871225
9501250000	250	677-992	1600-1915	5.400	871184	871226
9501300000	300	622-872	1650-1900	5.500	871185	871227