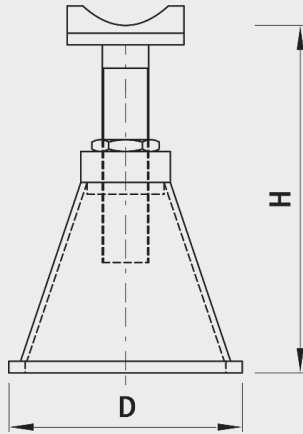


Pipe support, height 300 till 450 mm**9121****Application**

- Higher pipe supports made from INOX are available on request.

Characteristics

- Easy to assemble
- Stable
- Non-corrosive
- The height can be adjusted and it can be used universally
- Special heights on request

Material

- Supports: Aluminium
- Load receptor: INOX with plastic base

| | DN | H (mm) | D (mm) | Maximum bearing load | weight (kg) | NPK No. 411 |
|------------|-----|---------|--------|--------------------------|-------------|-------------|
| 9121000080 | 80 | 300-450 | 230 | Fmax = 30 kN 1"/SW 46 | 5.000 | 876138 |
| 9121000100 | 100 | 300-450 | 230 | Fmax = 30 kN 1"/SW 46 | 5.000 | 876139 |
| 9121000125 | 125 | 300-450 | 230 | Fmax = 30 kN 1"/SW 46 | 5.000 | 876141 |
| 9121000150 | 150 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876142 |
| 9121000200 | 200 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876143 |
| 9121000250 | 250 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876144 |
| 9121000300 | 300 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876145 |
| 9121000350 | 350 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876146 |
| 9121000400 | 400 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | 876147 |
| 9121000500 | 500 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | |
| 9121000600 | 600 | 300-450 | 230 | Fmax = 60 kN 2"/SW 75 | 5.000 | |

SW = width across flats