


Volantino

7800

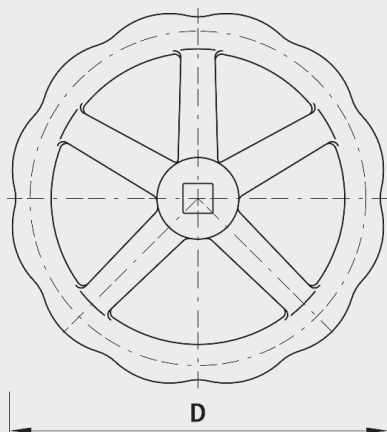

Applicazione

- Per tutti gli elementi di chiusura, allacciamento da 3/4" a 2", DN 20 a DN 40, saracinesca principale DN 50 a DN 600

Materiale

- Volantino
- Ghisa oppure acciaio con rivestimento in EWS secondo GSK, RAL-GZ 662, spessore dello strato min. 250 µm

	DN	D (mm)	Peso (kg)	N° CPN 411	N° CPN 412	BIM / CAD
7800040000	3/4"-2"	140	0.600	873114	871517	
7800050000	50	160	0.700	873116	817518	
7800080000	80-65	190	0.900	873118	871521	
7800100000	100	240	1.000	873119	871522	
7800125150	125-150	320	2.200	87312*	87152	
7800200000	200	360	3.200	873123	872525	
7800250350	250-350	485	4.500	87312*	87152	
7800400000	400	600	21.000	873127	871528	
7800500600	500-600	800	21.200			